

# Aquos 24 H2O



STOVE STRUCTURE CODE 7015049 (BAFA)  
EAN 8033123616744



## STEEL

**RED**  
6915022  
EAN 8033123616515


**IVORY**  
6915021  
EAN 8033123616508

## MAJOLICA

**IVORY**  
6915023  
EAN 8033123616522

**BRILLIANT BLACK**  
6915025  
EAN 8033123616546

**RED**  
6915024  
EAN 8033123616539

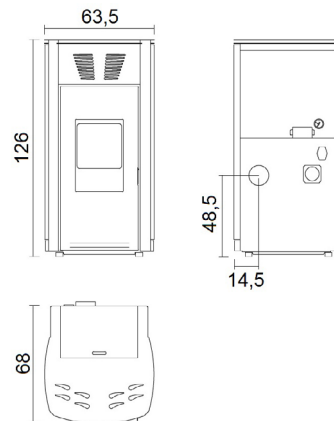

## EXTRA



Complete kit heating + domestic water



Overheating protection



Cast iron burning pot



Water temperature sensor



Connection to the external thermostat



Back exhaust



Hydraulic kit included



Handgrip against burn



Air temperature sensor



Daily weekly programming




Ventilation

## TECHNICAL DATAS


Nominal power	kW	24,8
Reduced power	kW	6
Nominal water useful power	kW	22,7
Reduced water useful power	kW	5
Nominal efficiency	%	91,6
Reduced efficiency	%	95,1
Heating volume (min-max)	m <sup>3</sup>	144 - 595
Nominal CO at 13% O <sub>2</sub>	%	0,008
Reduced CO at 13% O <sub>2</sub>	%	0,024
Nominal dust content at 13% O <sub>2</sub>	mg/Nm <sup>3</sup>	7
Boiler capacity (H <sub>2</sub> O)	l	25
Hopper capacity	kg	70
Combustible		<b>Pellet ø6</b>
Hourly consumption (min-max)	kg/h	1,2 - 5,2
Autonomy (min-max)	h	60,0 - 14,0
Ignition electrical absorption (max)	W	430
Operating electrical absorption (max)	W	120
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	10
Exhaust diameter	mm	100
Combustion air inlet diameter	mm	80
Mass of smoke (min-max)	g/sec	17,1
Exhaust fumes temperature (max)	°C	120
Net weight	kg	230 - 245
Gross weight	kg	240 - 255

## PACKAGING AND STOCKING

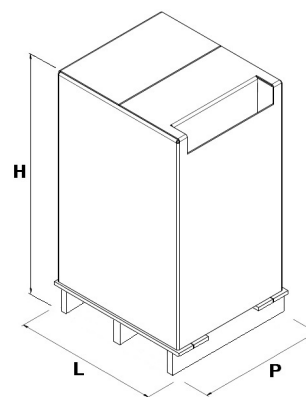

L (cm)	80
H (cm)	12
P (cm)	79

## LINING PACKING



LINING	L (cm)	H (cm)	P (cm)
Steel	96	8	46
Majolica	50	30	47



EN 14785:2006



BImSchV 2015



Regensburg



München



Stuttgart

Aachen